


Diagram 5

Typical Installation of the manually operable pole brace
to a typical existing awning canopy

- A1 Top end of pole brace secured to bottom slot channel of existing front linear aluminum extruded channel.
- A2 Lower end secured to a existing rail or wall.
- B1 Top end of pole brace secured to rear slot channel of existing canopy front linear aluminum extruded channel.
- B2 Lower end secured to a existing ground building surface.
- C During the partial projection of a existing awning canopy the lower end of pole brace may be secured to ground surface or side rail or wall.

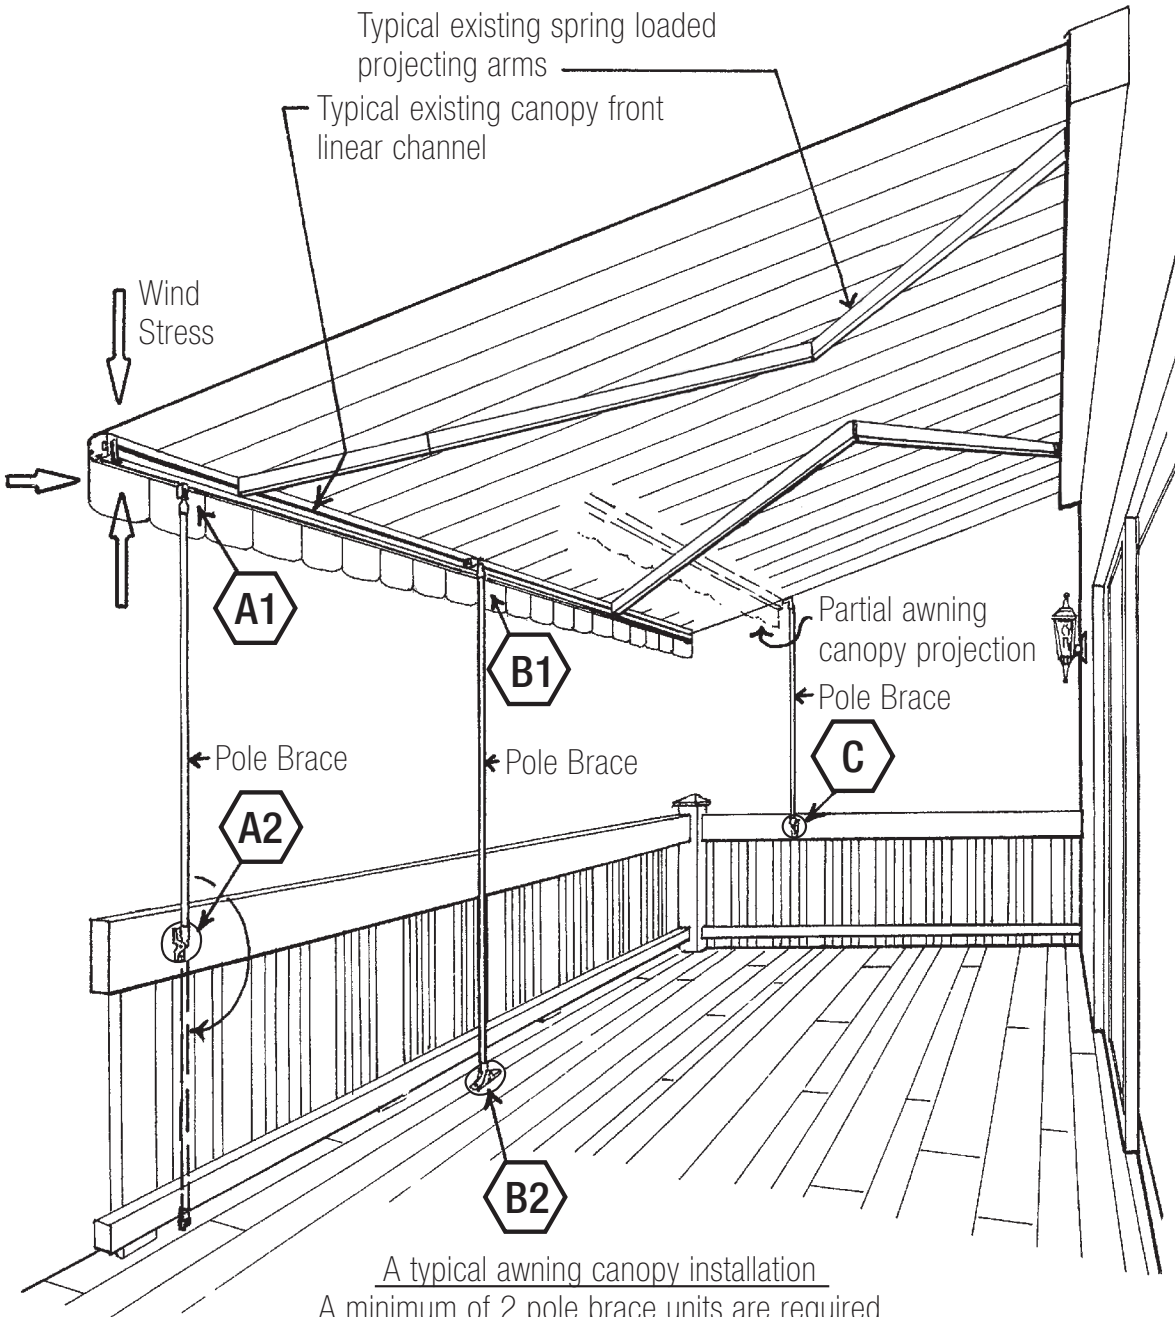

A typical awning canopy installation

A minimum of 2 pole brace units are required
1 per every existing projecting awning arm